JERSEY

NOUVEAU NEW

PLAFONNIER LED ÉTANCHE / WATERPROOF LED DOWNLIGHT

LED 9,6 W ≈ 18 W

VHF AIS CEM CE IP67 IK09

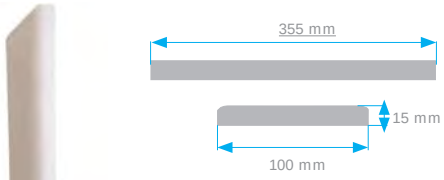

Ultra fin 15 mm
Ultra thin 15 mm (0.5 in)

Descriptif technique :

Robuste et économe en énergie, le JERSEY est idéal pour l'éclairage des salles machine de moyenne taille. Fixation arrière par vis. Matière : PC et ABS classés UL94 V0 certifiant la non inflammabilité des matériaux. Etanche IP67. Interrupteur et gradateur possibles (01652 et 01653). Fourni avec 4 vis de fixation et 1 mètre de câble. Eclairage de secours 24 VDC ou 230 VAC disponible en option.

Description :

Robust and not greedy in energy, JERSEY is ideal for the lighting of medium size engine rooms. Rear fixing by screws. Made in PC and ABS,UL94 V0 very low flammability classified. IP67 waterproof. Switch and dimmer available (01652 & 01653). Supplied with 4 mounting screws and 1 meter cable. Optional emergency lighting in 24 VDC or 230 VAC available.

	Alimentation Power supply	Puiss. lumineuse Lighting Power	Couleur Colour	Matériau Material	Poids Weight	Angle Beam angle	Conso. Cons.	Temp. Temp.	Sans inter. No switch	Inter.+gradateur. Switch&dimmer
Plafonnier 9,6W 9,6W Downlight	225-260 VAC	1600 lm	4500 K Blanc neutre Neutral white	PC+ ABS PC & ABS	290 g	120°	9,6 W	-20°C +70°C	01643	01652
Plafonnier 9,6W 9,6W Downlight	24-30 VDC	1600 lm	4500 K Blanc neutre Neutral white	PC+ ABS PC & ABS	290 g	120°	9,6 W	-20°C +70°C	01644	01653
Option secours Emergency lighting	24-30 VDC	140 lm	4500 K Blanc neutre Neutral white				3 W	-20°C +70°C	01377	
Option secours Emergency lighting	225-260 VAC	140 lm	4500 K Blanc neutre Neutral white				3 W	-20°C +70°C	01404	