



NAVISLIM VERTICAL / VERTICAL NAVISLIM



FEU CERTIFIÉ
WHEELMARK
CERTIFIED



10/30
VDC



IMO
COLREG 72

USCG



IP67
completely
sealed



76057/XX UK

60427/XX MED

Alimentation Voltage	10 - 30 VDC
Consommation électrique Power consumption	1.08 W / 3.24 W
Portée Visibility	2 MN / 3 MN 2 NM / 3 NM
Matériaux Material	PC + ASA traités UV UV proof PC + ASA
Indice d'étanchéité Waterproof rating	IP67
Dimensions Dimensions	H 38 x L 85 x l 45 mm
Poids Weight	170 g
Garantie Warranty	2 ans 2 years
Certification Certified	RED ENSIGN 76057/XX UK WHEELMARK 60427/XX MED / ABYC C-5
Fourni avec Supplied with	2m de câble + 2 vis M4 2m cable & 2 M4 screws
Finition Finishing	Blanc, noir ou inox poli White, black or polished SS

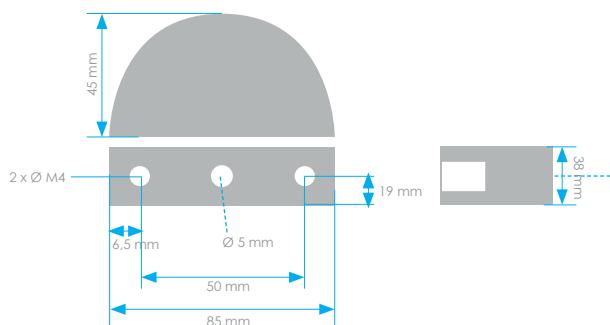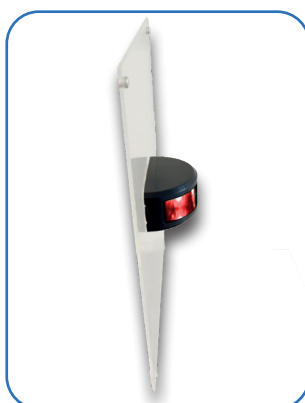

	Type Product description	Portée Visibility	Intensité lumineuse Lighting intensity	Consommation Consumption	Blanc White	Noir Black	Inox poli* Polished S.S*
	Babord Rouge 112,5° Port Red 112,5°	2 MN 2 NM	> 5,4 Cd	1,08 W	00287	00296	00305
	Tribord Vert 112,5° Starboard Green 112,5°	2 MN 2 NM	> 5,4 Cd	1,08 W	00288	00297	00306
	Bicolore Vert/Rouge 112,5° Combined Green/red 112,5°	2 MN 2 NM	> 5,4 Cd	2,76 W	00289	00298	00307
	Hune ou de mât Blanc 225° Masthead White 225°	2 MN 2 NM	> 5,4 Cd	1,08 W	00290	00299	00308
	Hune ou de mât Blanc 225° Masthead White 225°	3 MN 3 NM	> 15 Cd	4,32 W	00291	00300	00309
	Poupe Blanc 135° Stern White 135°	2 MN 2 NM	> 5,4 Cd	2,16 W	00292	00301	00310
	Rouge 180° x2 Babord/Tribord Red 180° x2 Starboard/Port	2 MN 2 NM	> 5,4 Cd	2,76 W x 2	00293	00302	00311
	Blanc 180° x2 Babord/Tribord White 180° x2 Starboard/Port	2 MN 2 NM	> 5,4 Cd	3,24 W x 2	00294	00303	00312
	Vert 180° x2 Babord/Tribord Green 180° x2 Starboard/Port	2 MN 2 NM	> 5,4 Cd	2,76 W x 2	00295	00304	00313
	Kit Babord x1 / Tribord x1 / Poupe x1 Starboard x1 / Port x1 / Stern x 1 kit	2 MN 2 NM	> 5,4 Cd	1,08 W x 2 2,16 W x 1	00347	00348	00349

* Disponibles au 2T 2026 / *Available Q2 2026



76057/XX UK




60427/XX MED

FEU CERTIFIÉ
WHEELMARK
CERTIFIED



Alimentation Voltage	10 - 30 VDC
Consommation électrique Power consumption	1.08 W / 3.24 W
Portée Visibility	2 MN / 3 MN 2 NM / 3 NM
Matériaux Material	PC + ASA traités UV UV proof PC + ASA
Indice d'étanchéité Waterproof rating	IP67
Dimensions Dimensions	H34 x L85 x l 58mm
Poids Weight	170 g
Garantie Warranty	2 ans 2 years
Certification Certified	RED ENSIGN 76057/XX UK WHEELMARK 60427/XX MED / ABYC C-5
Fourni avec Supplied with	2m de câble + 2 vis M4 2m cable & 2 M4 screws
Finition Finishing	Blanc, noir ou inox poli White, black or polished SS

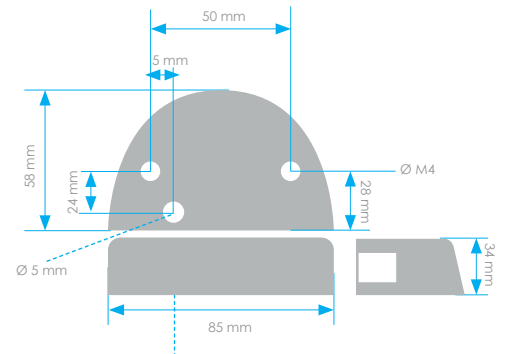

Type Product description	Portée Visibility	Intensité lumineuse Lighting intensity	Consommation Consumption	Blanc White	Noir Black	Inox poli* Polished S.S.*
Babord Rouge 112,5° Port Red 112,5°	2 MN 2 NM	> 5,4 Cd	1,08 W	00314	00323	00332
Tribord Vert 112,5° Starboard Green 112,5°	2 MN 2 NM	> 5,4 Cd	1,08 W	00315	00324	00333
Bicolore Vert/Rouge 112,5° Combined Green/red 112,5°	2 MN 2 NM	> 5,4 Cd	2,76 W	00316	00325	00334
Hune ou de mât Blanc 225° Masthead White 225°	2 MN 2 NM	> 5,4 Cd	1,08 W	00317	00326	00335
Hune ou de mât Blanc 225° Masthead White 225°	3 MN 3 NM	> 15 Cd	4,32 W	00318	00327	00336
Poupe Blanc 135° Stern White 135°	2 MN 2 NM	> 5,4 Cd	2,16 W	00319	00328	00337
Rouge 180° x2 Babord/Tribord Red 180° x2 Starboard/Port	2 MN 2 NM	> 5,4 Cd	2,76 W x 2	00320	00329	00338
Blanc 180° x2 Babord/Tribord White 180° x2 Starboard/Port	2 MN 2 NM	> 5,4 Cd	3,24 W x 2	00321	00330	00339
Vert 180° x2 Babord/Tribord Green 180° x2 Starboard/Port	2 MN 2 NM	> 5,4 Cd	2,76 W x 2	00322	00331	00340
Kit 112,5° Babord x1 / Tribord x1 Starboard x1 / Port x1 112,5° kit	2 MN 2 NM	> 5,4 Cd	1,08 W x 2	00350	00351	00352

* Disponibles au 2T 2026 / *Available Q2 2026